


ç|ÈI Ì ÁÇI Ì DÀHÌ HÈFÈI ÁÈÈ æIKÈ } O { [ç æ ã È ~

T UVUÜÒÖWSVUÜKNMRV-025/030

{ [ç ! ^ à ~ \ ç ! Á [å , 5 ð ^ ÁÇI Î ÓFI D






WIDOK 3D






ÖÖË ÒÁÒÔÏ ÒÛÏ ÒÁÛ ÆÛÛ

GR Size	025-030
ES Execution	AS1
PAM Input PAM flange	56 B14
ACU1 Output hole shaft gear unit 1 (d)	11
VB1 Double input shaft gear unit 1	NO
ACU2 Output hole shaft gear unit 2 (d)	14
VB2 Double input shaft gear unit 2	NO
TFU Output flange gear unit 2	NO
DFU Output flange dimension gear unit 2 (d)	-
PFU Output flange position gear unit 2	-
AL2 Output hole shaft gear unit 2 (d)	NO
PAL Output shaft position gear unit 2	-
CAP Cover gear unit 2	NO
TIP Motor type	T-Three phase
GRA Motor size	056
RAF Cooling	IC411-Self-Ventilated
FC Motor execution	B14
TF Break type	-
AF Brake power supply	-
COP Terminal box cover	Aluminium
CVE Fan cover	Default
MOR Terminal box cover position	1
A	70
AC	-
B	45
BB	5
BM	-
D	14
DM	-
E	-

F	-
G1	63
H	40
H2	35
I	30
I2	25
L	-
LB	-
N2	22.5
PM	80
R	57
R2	48
T	21
TM	-
TT	16.3
Z	100

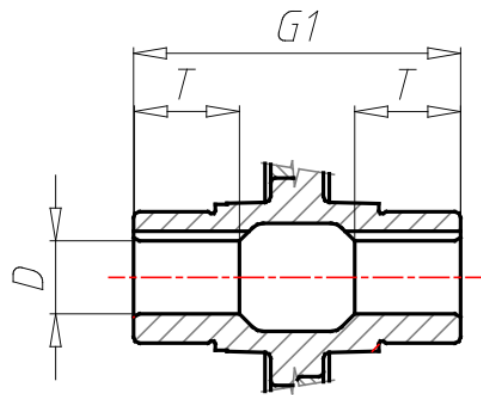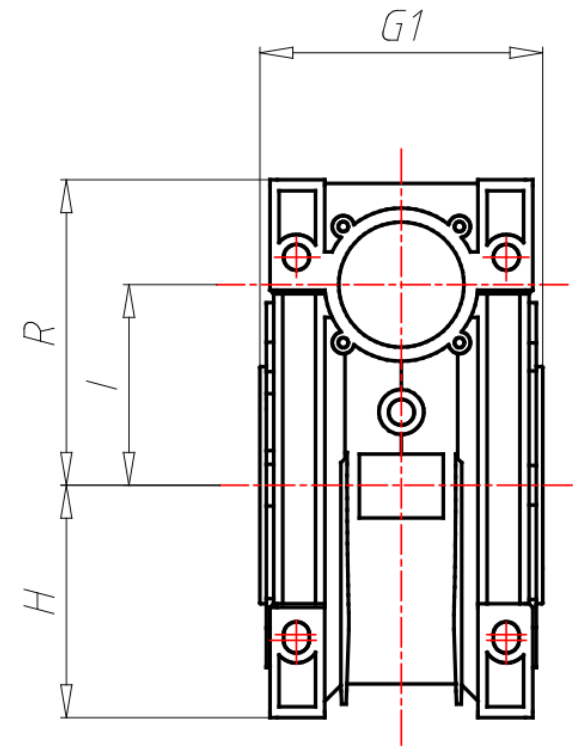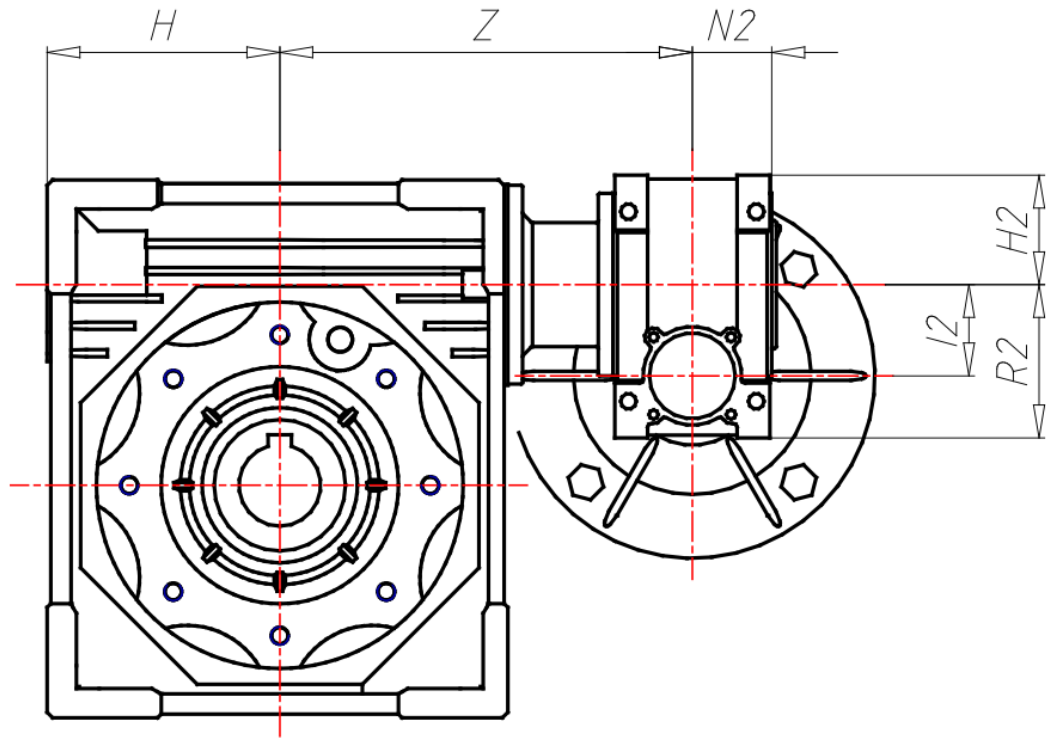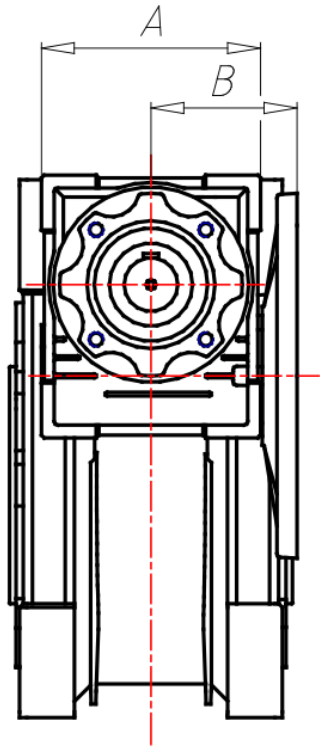

DESIGN

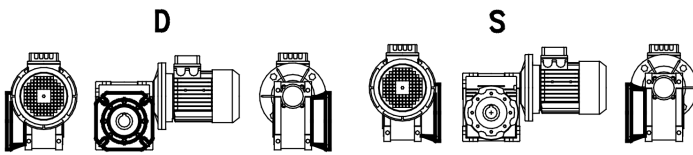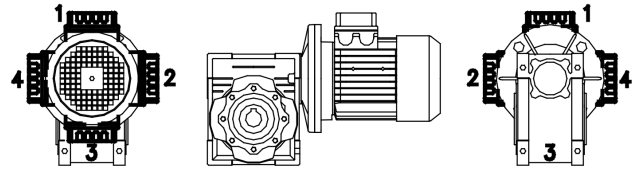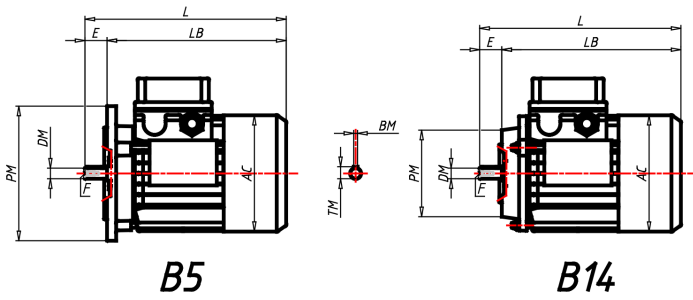

DESIGN

Ö [Á ^ ~ | a a a | c , Á [d | ^ a ~ \ d ! 5 , Á y Á a , } a a a | { a a Á & @ & } ^ Á a a a { a a Á ^ ! , a a a & K

@j KDa| , } a a a |

@j KDa| , } a a a |

@j KDa| , } a a a | { a a a |

@j KDa| , } a a a |