


ç | È | Ì | Á | È | Ì | D | Ì | H | È | F | È | Ì | Á | È | æ | Ì | O | { | [| ç | æ | ã | È | ~

T U V U Ü Ö Ö W S V U Ü K N M R V - 0 5 0 / 1 1 0

{ | [| ç | Ì | ^ | à | ~ | \ | ç | Ì | Á | [| à , 5 | b | ^ | Á | Ç | Î | H | Ó | Í | D






WIDOK 3D






ÖÖË ÒÁÒÔÏ ÒÏÏ ÒÁÏ ÏÏÏ

GR Size	050-110
ES Execution	AS1
PAM Input PAM flange	63 B5
ACU1 Output hole shaft gear unit 1 (d)	25
VB1 Double input shaft gear unit 1	NO
ACU2 Output hole shaft gear unit 2 (d)	42
VB2 Double input shaft gear unit 2	NO
TFU Output flange gear unit 2	NO
DFU Output flange dimension gear unit 2 (d)	-
PFU Output flange position gear unit 2	-
AL2 Output hole shaft gear unit 2 (d)	NO
PAL Output shaft position gear unit 2	-
CAP Cover gear unit 2	NO
TIP Motor type	T-Three phase
GRA Motor size	063
RAF Cooling	IC411-Self-Ventilated
FC Motor execution	B5
TF Break type	-
AF Brake power supply	-
COP Terminal box cover	Aluminium
CVE Fan cover	Default
MOR Terminal box cover position	1
A	120
AC	121
B	80
BB	12
BM	4
D	42
DM	11
E	23

F	M4x10
G1	155
H	127.5
H2	60
I	110
I2	50
L	211
LB	188
N2	43.5
PM	140
R	167.5
R2	84
T	50
TM	12.5
TT	45.3
Z	226

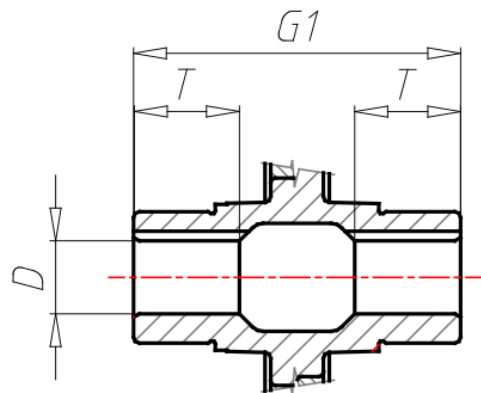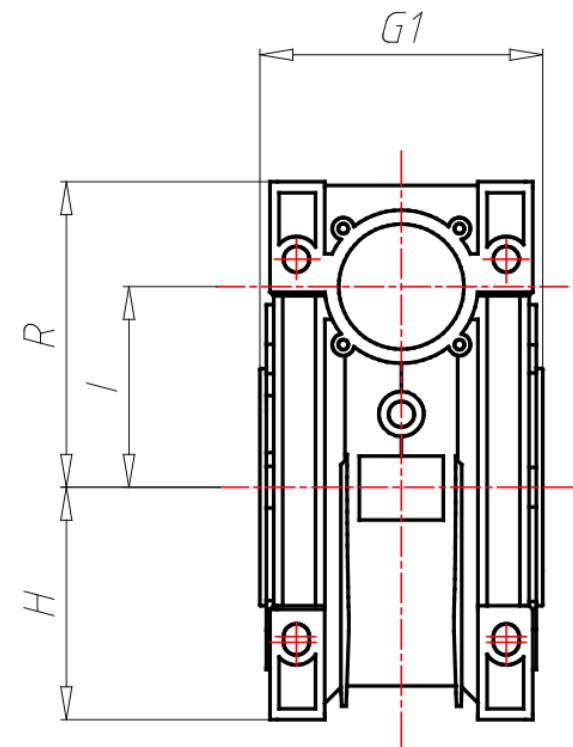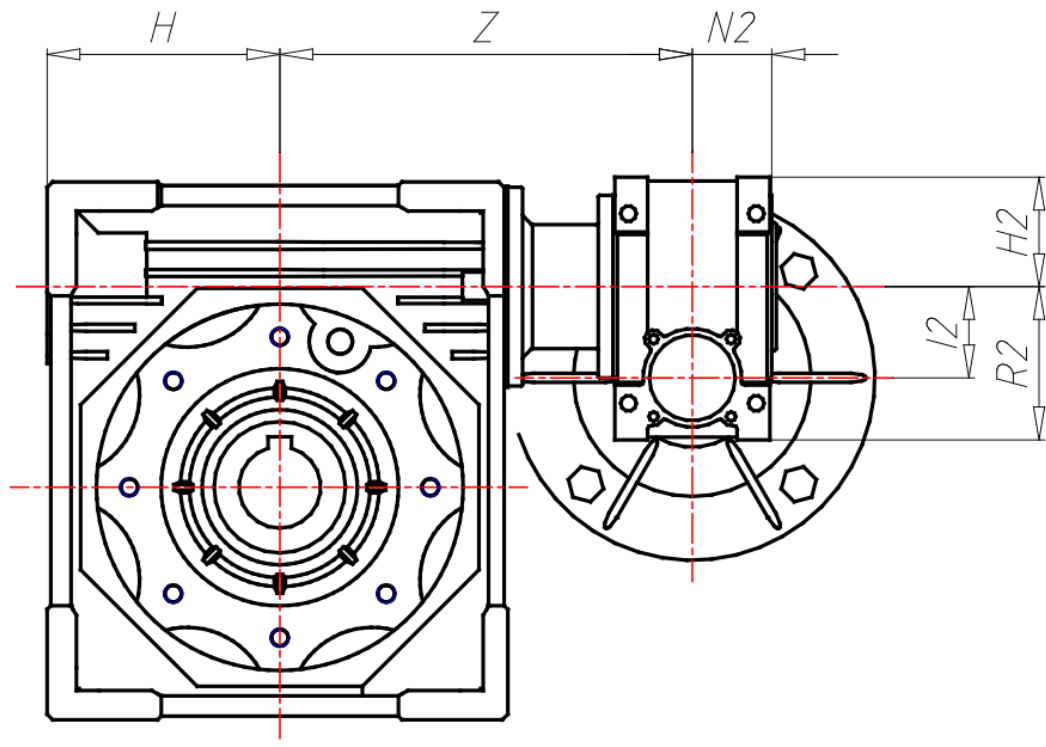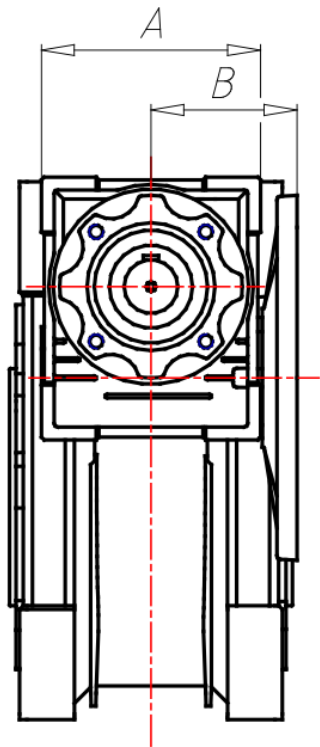

DESIGN

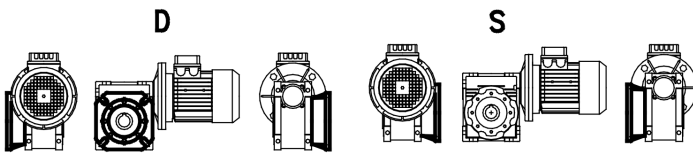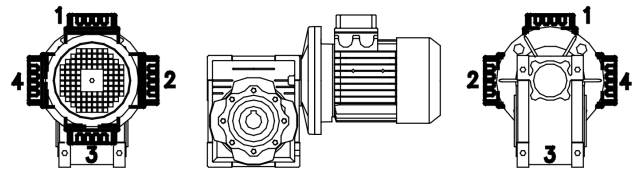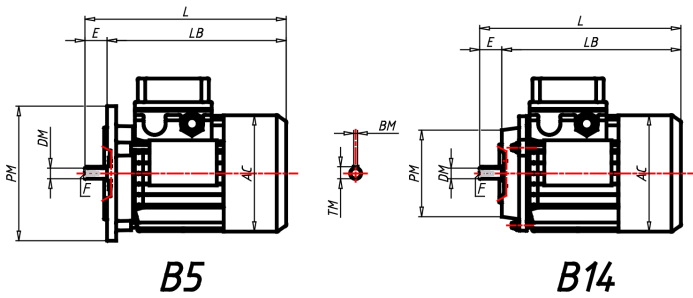

DESIGN

Ö [Á^*~ |æßñ ài[ç, Á [ç |^á\ ç |5, Á ç • ð Áã Áçñ, } ä zÖç ^ Á & @ & } ^ Á æßç { æç Á ^!, ä æç & @ & } ^ & @

çç KDeç ^à•^•ç{ È |D

çç KDeç |, } ä æç |D

çç KDeç |, } ä æç { È |D

çç KDeç |, } ä æç †D