


MOTOREDUKTOR: NMRV-090-100B14

WIDOK 3D



PRODUCT DESCRIPTION:

Worm geared motor fitted for motor coupling
version PAM with sleeve

PDF DATASHEET

PRODUCT TYPE: NMRV

CONFIGURATION & DIMENSIONAL VALUES

GR Size	090
PAM Input PAM flange	100/112 B14
ACU Output hole shaft (d)	35
VB Double input shaft	NO
TFU Output flange gear unit 2	NO
DFU Output flange dimension (d)	-
PFU Output flange position	-
AL Output hole shaft (d)	NO
PAL Output shaft position	-
BR Torque arm	NO
PBR Torque arm position	-
CAP Cover	NO
TIP Motor type	T-Three phase
GRA Motor size	100
RAF Cooling	IC411-Self-Ventilated
FC Motor execution	B14
TF Break type	-
AF Brake power supply	-
COP Terminal box cover	Aluminium
CVE Fan cover	Standard
MOR Terminal box cover position	1
A	140
AC	191
B	50
B1	8
BB	10
BM	8
BM1	8
D	35(38)
D1	24

PRODUCT DESCRIPTION:

Worm geared motor fitted for motor coupling
version PAM with sleeve


PDF DATASHEET

PRODUCT TYPE: NMRV

CONFIGURATION & DIMENSIONAL VALUES

DM	28
DM1	28
E	60
F	M8
FF	M10x22
G	129.5
G1	140
H	103
I	90
K	100
KE	M10x18(8)
L	130
LB	308
LL	368
M	130
N	110
N1	67
O	13
P	160
PM	160
PM1	160
Q	102
R	135
S	11
T	45
T1	27
TM	31.3
TM1	31
TT	38.3(41.3)
V	70
W	45°

2D VIEW PRA

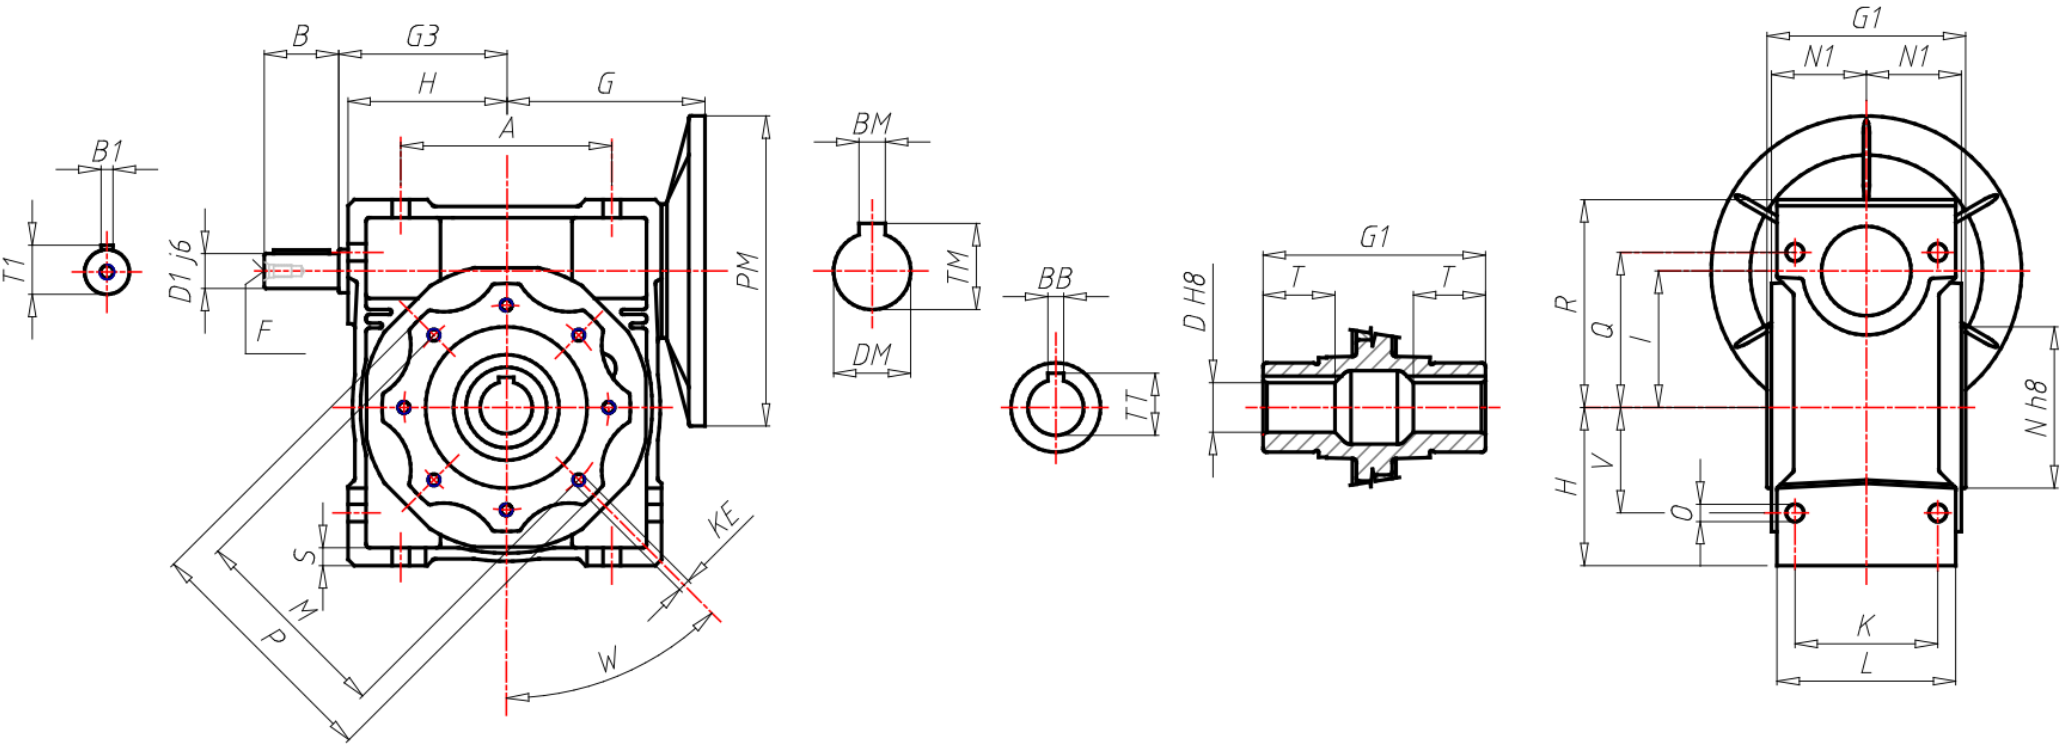

PRODUCT DESCRIPTION:

Worm geared motor fitted for motor coupling
version PAM with sleeve

PDF DATASHEET

PRODUCT TYPE: NMRV

2D VIEW ACCESSORIES

